

PRODUCT CATALOG 2022

DEAR CUSTOMER

We hope you will find this 2022 KEOFITT Product Catalog helpful identifying the right KEOFITT product for your sampling application.

At KEOFITT we pride ourselves with the fact that "All we do is sampling!". This is still true now more than 40 years after the company was founded.

Being the world market's only true specialist KEOFITT has developed the widest and deepest product range available for hygienic, sterile and aseptic sampling of liquids in all industries.

Further information can be found at www.KEOFITT.dk or by contacting your local KEOFITT distributor.



KEOFITT SESAME

Taking the successful design of the classic KEOFITT valves to the third millennium: The patented KEOFITT SESAME™ is the only steam-sterilizable sampling valve in the world to completely eliminate the usually unavoidable dead-space involved with the steam-inlet connection.


SESAME


This gives you:


- No open steam inlet while sampling: No risk of steam condensate or other leftovers secretly contaminating your sample.
- Minimal volume in valve chamber when sampling: Minimal sample size required.
- Unique, incorporated sterilization of the area behind the membrane and the seal between the valve head and the valve chamber: No risk of cross-contamination from the valve actuator area.
- Increased efficiency during sterilization due to steam flow angle: Optimal sterilization of valve seat in minimum time.
- Unique, incorporated CIP/SIP control valve: Eliminates need for additional control valve in most cases.
- Fully drainable even when positioned upside-down in the bottom of a tank: More than just the best-ever sampling valve design, this makes it the best designed bottom/harvest valve in the marketplace.




HOW IT WORKS










ADVANTAGES

1. Sample will never spray out through the steam inlet during sampling. With normal valves, this happens when the operator forgets to mount the cap or the cap disconnects.



2. It is not possible to unintentionally send steam or CiP fluids into the process line, as the sample seat and the steam seat cannot open simultaneously. This is a risk with all other valves as the steam inlet is open even during sampling.



3. Aseptic sampling in a closed system cannot be compromised in case the operator leaves the steam inlet open during sampling. Other valves will open for sampling even if steam inlet is open allowing airborne contamination of the sample.



KEOFITT SESAME™ SAMPLING VALVE

The KEOFITT SESAME™ Sampling Valve is KEOFITT's newest and patented dual-seat sampling valve. Truly unique in the market, it offers optimal CIP and SIP conditions while also incorporating steam supply control and completely eliminating the steam inlet dead-space in other designs.

The unique feature of this valve is in its membran e design which incorporates two separate seats for sampling and sterilizing/sanitizing, respectively. The second seat is located in the area sealing off the valve head. This design allows the sealing area to be sterilized along with the valve chamber prior to each sampling procedure. Furthermore, no separate inlet is required, thus eliminating any dead space while sampling.

The KEOFITT SESAME™ valve is designed for sampling of low or medium viscosity products in the range of 0-1,000 cP with particles less than 3 mm in diameter. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure). The double-seat SESAME™ valve is used in a range of applications such as brewery, dairy, pharmaceutical and biotechnological companies, with a wide range of products such as:

- Medical Solutions
- Filtered and Unfiltered Beer
- Creams and Lotions
- Unprocessed Milk
- Perfume



KEOFITT SESAME VALVE - BODIES

		W	ELDING BODII	ES			CON	NECTION BO	DIES			ING	OLD
		TANK WELDING	PIPE WELDING	PIPE WELDING NW25	VARIVENT Ø50	VARIVENT Ø68	MINI CLAMP	CLAMP 1" & 1½"	CLAMP 2"	THREAD	UNION DIN 11851	INGOLD 40MM PORT LENGTH	INGOLD 52MM PORT LENTGH
	HOSE PIECE									9) PONESY.		9) tegless.	011691665*
		890001	890011	890014	890008	890009	890036	NA-CONNECT ASME/DIN 890021	890003		890040		
SESAME BODIES	1/2" TRI-CLAMP	4		on request.	9) request		4	NA-CONNECT		on request.	On request		
AME	1	890006	890010			890013	890039	ASME/DIN 890022	890005			893105	893205
SESAN	THREAD M16X1,5	07 PQUEST	97 teglesz	07 teglesz	97 teglesz	07 teglesz	977 Feylless	977 FQUEST	07 teglesz	977 FQ 1/1657	971 PS 11/0	07 to Uest	977 EQUEST
	1/2" WELDING ENDS	890007	890019	On tequest	On Feduesz	011 Februses	01 to Uest	01 Februss	On tequest	01 F8 URSK	0) FeQUESK	On tequest	On request

KEOFITT SESAME VALVE - HEADS

		TYPE H TURN KNOB 0-10 BAR	TYPE Q LEVER HANDLE 0-10 BAR	TYPE N PNEUMATIC 0-10 BAR
	SILICONE	890041	890043	890044
		890041	690043	890044
SESAME HEADS	ЕРБМ	890041E	890043E	890044E
		090041L	030043L	030044L
	PTFE			
		895541	895543	895544

KEOFITT SESAME INGOLD VALVE - HEADS

		TYPE H TURN KNOB 0-10 BAR	TYPE Q LEVER HANDLE 0-10 BAR	TYPE N PNEUMATIC 0-10 BAR
SESAME INGOLD HEADS	INGOLD 140 PTFE	9031410155	2021 42 DIFF	9021440755
D N I		893141PTFE	893143PTFE	893144PTFE
SESAME	INGOLD I52 PTFE			
		893241PTFE	893243PTFE	893244PTFE

KEOFITT SESAME - PARTS & ACCESSORIES

	O-RINGS	300119 20.24X2.62 FDA	400208 EPDM 60X3	400308 EPDM 42X3	550184 FESTO	880830 EPDM 20.35X1.78			
& ACCESSORIES	MEMBRANES	890051 SILICONE	890052 EPDM	890055 PTFE	895531 PTFE (I40)	895532 PTFE (I52)			
PARTS & ACCE	FOR VALVE HEADS	600170 LEVER HANDLE N	600370 LEVER HANDLE Q SELF-CLOSING	880255 TOOL FOR PTFE	890170 LEVER HANDLE Q	890370 LEVER HANDLE Q SELF-CLOSING			
SESAME	E PIECE	550002 PTFE QC 0.5M	550003 PTFE QC 1.0M	550057 KÄRCHER ADAPTER	600062 RUBBER CAP	800013 QC SPIKE	800053 QC/QC W9	800058 QC COIL	800059 QC XL COIL
	FOR HOSE PIECE	800061 QC PLUG	800070 QC STEEL PIPE	800082 QC HOSE BARB 3/8	800083 QC TC	800086 QC W9 WITH M4 HP	800091 QC PTFE	800171 QC ADAPTER HP/ THREAD	900045 QC SYRINGE INJECTION

KEOFITT SESAME - PARTS & ACCESSORIES

	1P							 	
	RI-CLAN	300021 CLAMP PTFE 10/8	550002.2 PTFE QC/TC O.5M	550003.2 PTFE QC/TC 1M	550004 PTFE TC 0.5M	550005 PTFE TC 1.0M	800014 ADAPTER TC/1"	900013 MINI CLAMP SPIKE	900096 ADAPTER HP/TC
& ACCESSORIES	FOR MINI TRI-CLAMP	900097 ADAPTER M4 HP/TC							
PARTS & ACCE	C.	700108 HP W9 F/WELDING	800052 HP/HP W9	900031 HP W9/ MALE THREAD M12X1	890063 SINGLE ST. ST.	890064 DOUBLE ST. ST. CHAIN	900047 TUBE PTFE 10/8		
SESAME	MISC.	900074 GASKET EPDM 3/4"	900087 GASKET EPDM ½"	900091 GASKET EPDM 1"	900092 GASKET EPDM 2"	900075 CLAMP RING ½"	900086 CLAMP RING 1"	900189 CLAMP RING FOR SESAME VALVE	900021 MINI BLIND CAP

KEOFITT CLASSIC

Coaxial steam sterilizable design with separate inlet for SIP and CIP: The reference for hygienic and microbiological sampling for four decades, this is the original, in-situ sterilizable sampling valve that continues to revolutionize the field of sterile sampling.

CLASSIC


Refined over the years - inside electro-polish being the latest addition - it remains the most popular and best selling valve in the market by far. It is based on KEOFITT's unique, patented membrane and is used in more than 300,000 sampling points worldwide.


Available in several models/sizes:

- W9 (ID 9 MM)
- INGOLD (ID 9 MM)
- 4KAI (ID 5 MM)
- W15 (ID 15MM)
- W25 (ID 25MM)



HOW IT WORKS

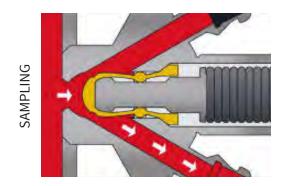

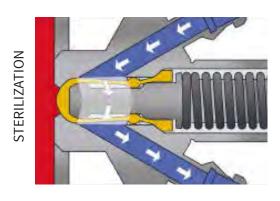

KEOFITT CLASSIC W9 SAMPLING VALVE

The KEOFITT CLASSIC W9 Sampling Valve is considered the father of all steam-sterilizable sampling valves. Refined through 40 years of experience it remains KEOFITT's most popular sampling valve. Designed for the sampling of medium viscosity products in the range of 0-1000 cP with particles less than 3 mm in diameter, it covers most needs for liquid sampling. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).

This valve is used in a range of industries such as brewery, dairy, pharmaceutical and bio-tech for products such as:

- Medical solutions
- Filtered Beer
- Creams and lotions
- Unprocessed milk

Besides the selection of the Valve Body and the Valve Head there are three different membrane materials to choose from: Silicone, EPDM and PTFE.

Accessories include quick couplings for the connection of tubing, piping and more.



KEOFITT CLASSIC W9™ SAMPLING VALVE - BODIES

			WI	ELDING BODI	ES				CON	NECTION BO	DIES		
		TANK WELDING	PIPE WELDING 1"	PIPE WELDING NW25	IN-LINE VERTICAL	IN-LINE HORIZONTAL	VARIVENT Ø50	VARIVENT Ø68	MINI CLAMP	CLAMP 1" & 1½"	CLAMP 2"	CLAMP 3"	THREAD M28X1,5
	HOSE PIECE	850001	850011	850014	850027*	850028*	850008	850009	850036	850021	850003	850004	M28X1.5 850031 DIN 11851 DN 10 850040
W9™ BODIES	1/2" TRI-CLAMP	850006	850010	97 F8 JUSY	97 POUCSY	97 Feyless	850020	850013	850039	850022 850025	850005 850026	97 tegliesz	07 PQUESY
SM	THREAD M16X1,5	850015	850016	850018	ON FOQUEST	On request	on request	0) 100005	00,000	850024	0) 16940854	0) 1.60(0.65)	850037
	%, WELDING ENDS	850007	850019	ON FERTICES.	ON FEQUESS	On request	On request	0) 10000	0) 1.60(0.65)	On request	ON FOLLOSS	On reduces.	on request

^{*} ON REQUEST ONLY!

KEOFITT CLASSIC W9™ SAMPLING VALVE - HEADS

		TYPE H TURN KNOB 0-10 BAR (FFKM 0-6 BAR)	TYPE H TURN KNOB W/ MICROPORT 0-10 BAR	TYPE K KEY RING 0-10 BAR (FFKM 0-6 BAR)	TYPE K KEY RING W/OPT. MICROPORT 0-10 BAR	TYPE Q LEVER HANDLE 0-10 BAR (FFKM 0-6 BAR)	TYPE N PNEUMATIC 0-10 BAR (FFKM 0-6 BAR)	TYPE N PNEUMATIC, ADJUSTABLE 0-10 BAR (FFKM 0-6 BAR)	TYPE B NO SPRING 0-12 BAR(G)
	SILICONE								
		600041	600048	600042	600049	600043	600044	600045	600047
W9™ HEADS	ЕРДМ								
Σ		600041E	600048E	600042E	600049E	600043E	600044E	600045E	600047E
6M	FFKM		On request		O) request				
		600041F*		600042F*		600043F*	600044F*	600045F*	600047F*
	PTFE		on request		On request				
		855541		855542		855543	855544	855545	855547


KEOFITT CLASSIC W9™ - PARTS & ACCESSORIES


	O-RINGS	400208 EPDM 60X3	400308 EPDM 42X3	550184 FESTO	600825 SILICONE 7.1X1.6	600825E EPDM 7.1X1.6	800830 SILICONE 10.3X2.4	800830E EPDM 10.3X2.4	800859 SILICONE 7.5X2.5	900829 EPDM 21X4
RIES	MEMBRANES	600051 SILICONE	600052 EPDM	600053 FFKM	600251 SILICONE MP	600252 EPDM MP	850055 PTFE			
ACCESSORI	FOR THREAD M16X1,5	700061 STEEL CAP	700062 HP W9 16X1.5	700070 TUBE FITTING WL	700071 TUBE FITTING PTFE	700084 BARB 4MM	700085 BARB 6MM			
W9™ PARTS &		550002 PTFE QC 0.5M	550003 PTFE QC 1.0M	550057 KÄRCHER ADAPTOR	600062 RUBBER CAP	800013 QC SPIKE	800053 QC/QC W9	800058 COIL	800059 XL COIL	800061 QC PLUG
™ M9	FOR HOSE PIECE	800070 QC STEEL PIPE	800082 QC HOSE BARB 3/8	800083 QC TC	800085 QC W9 LUER LOCK ADAPTER	800086 QC W9 WITH M4 HP	800088 QC HOSE BARB Ø4	800091 QC W/HOSE BARB FOR PTFE 10/8	800095 QC W9 MALE LUER LOCK ADAPTER	800171 QC PTFE M16X1.5
		900031 HP MALE THREAD M12	900045 QC SYRINGE INJECTION							

KEOFITT CLASSIC W9™ - PARTS & ACCESSORIES

	•	III CLAS	-1-11-	. /	ACCESS					
	FOR MINI TRI-CLAMP	300021 CLAMP PTFE 10/8	550004 PTFE TC 0.5M	550005 PTFE TC 1.0M	800014 ADAPTER TC/1"	900013 MINI CLAMP SPIKE	900096 ADAPTOR W9/W15 HP/TC	900097 ADAPTER M4 HP/TC		
IES	FOR VALVE HEADS F	600076 KEY RING	600149 BUSHING	600255 TOOL PTFE	900018 TOMMY BAR	600170 LEVER HANDLE Q/N	600370 LEVER HANDLE SELF-CLOSING			
& ACCESSORIES		550002.2 PTFE QC/TC O.5M	550003.2 PTFE QC/TC 1.0M	900047 TUBE PTFE 10/8	600063 SINGLE ST. ST. CHAIN	600064 DOUBLE ST. ST. CHAIN	600066 SINGLE ST. ST. CHAIN W/HOOK	400166 PROXIMITY SENSOR	600266 PROXIMITY SENSOR	600267 PROXIMITMOUNTING KIT
W9™ PARTS &	MISC.	700108 HOSE PIECE	800052 HOSE PIECE/ HOSE PIECE	800075 WELDING PIECE FOR PTFE	850840 PINOL SCREW	900008 SOCKET ALU-TANKS	900022 NEEDLE	900069 WICK W9 VALVE MP	900021 BLIND CAP	900076 BLIND CAP 1"
6M		900074 GASKET EPDM 3/4"	900087 GASKET 1/2"	900091 GASKET EPDM 1"	900092 GASKET EPDM 2"	900093 GASKET EPDM 3"	900075 CLAMP RING 1/2"	900086 CLAMP RING 1"	900186 CLAMP RING 2"	

HOW IT WORKS

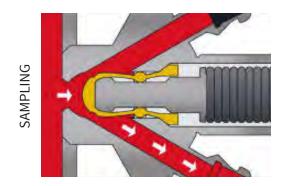

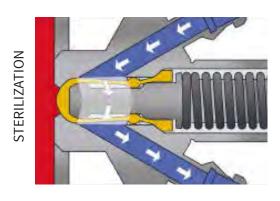

KEOFITT CLASSIC INGOLD SAMPLING VALVE

The KEOFITT CLASSIC INGOLD sampling valve is designed to fit bio-connectors type Ingold[®]. Designed for the sampling of medium viscosity products in the range of 0-1000 cP with particles less than 2 mm in diameter, it covers most needs for liquid sampling. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).

This valve is used in a range of industries such as brewery, dairy, pharmaceutical and bio-tech for products such as:

- Medical solutions
- Filtered Beer
- Creams and lotions
- Unprocessed milk

Besides the selection of the Valve Body and the Valve Head there are three different membrane materials to choose from: Silicone, EPDM and PTFE.

Accessories include quick couplings for the connection of tubing, piping and more.



KEOFITT CLASSIC INGOLD SAMPLING VALVE - BODIES & HEADS

		STANDA 40 MM POR	RD FOR T LENGTH*	STANDARD FOR 52 MM PORT LENGTH*		
	HOSE PIECE	On request	On request		On request	
INGOLD BODIES	MINI TRI-CLAMP	310002	310005	320002	320005	
	WELDING LINER	On requess.	07 PeqUess	07 PeqUess*	320007	


	LEVE DODIES & HEADS								
	TYPE H TURN KNOB 0-10 BAR(G)		KNOB	TYP LEVER I 0-10 B	HANDLE	TYP LEVER I PNEUMATIC		TYPE N PNEUMATIC, ADJUSTABLE 0-10 BAR	
	SILICONE							on request	
		310041	320041	310043	320043	310044	320044		
INGOLD HEADS	EPDM	310041E	320041E	310043E	320043E	310044E	320044E	on request	
	PTFE							on request	
		315541	325541	315543	325543	315544	325544		


^{*} OTHER PORT LENGTH - AVAILABLE ON REQUEST

KEOFITT CLASSIC INGOLD - PARTS & ACCESSORIES

	O-RINGS	300118 EPDM 20.24X2.62	300119 20.24X2.62 FDA	550184 FESTO							
ESSORIES	MEMBRANES	310051 SILICONE (I40)	310052 EPDM (I40)	310055 PTFE (I40)	320051 SILICONE (I52)	320052 EPDM (I52)	320055 PTFE (I52)				
PARTS & ACCESSORIES	FOR MINI TRI-CLAMP	300021 CLAMP PTFE 10/8	550004 PTFE TC 0.5M	550005 PTFE TC 1.0M	800014 ADAPTER MINI CLAMP/1" CLAMP	800083 QC TC	900013 MINI CLAMP SPIKE	900096 ADAPTER HP/TC	900097 ADAPTOR M4 HP/TC		
INGOLD -	VALVE HEADS	300255 TOOL PTFE (I40/I52)	550002.2 PTFE TUBING W/ QC/TC 0.5M	550003.2 PTFE TUBING W/ QC/TC 1 M	600149 BUSHING	600170 LEVER HANDLE Q/N	600370 LEVER HANDLE SELF-CLOSING	850840 PINOL SCREW F/ W9 HEAD	900018 TOMMY BAR	900074 GASKET EPDM 3/4"	900087 GASKET EPDM 1/2"
	MISC.	320530 ADAPTOR 30MM (I52)V	320540 ADAPTOR 40 MM (152)	320830 ADAPTOR PTFE 50MM (I52)	400166 PROXIMITY SWITCH FOR M4/ W9	600266 PROXIMITY SENSOR W9 CLOSED POS.	600267 PROXIMITY SENSOR W9 MOUNTING KIT	700108 HOSE PIECE W9	900021 BLIND CAP FOR MINI CLAMP	900075 CLAMP RING 1/2"	

HOW IT WORKS

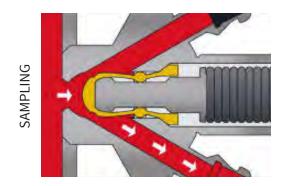

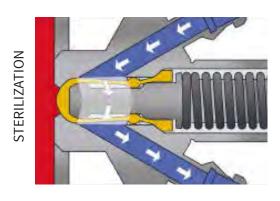

KEOFITT CLASSIC 4KAI SAMPLING VALVE

The KEOFITT CLASSIC 4KAI Sampling Valve is the smallest KEOFITT CLASSIC valve available. It is designed for the sampling of low viscosity products in the range of 0-100 cP with particles less than 1.5 mm in diameter. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).

This valve is used in a range of industries such as brewery, dairy, pharmaceutical and bio-tech for products such as:

- Water
- Milk
- Medical solutions
- Filtered Beer
- Perfume
- Olive Oil

Besides the selection of the Valve Body and the Valve Head there are three different membrane materials to choose from: Silicone, EPDM and PTFE.

Accessories include quick couplings for the connection of tubing, piping and more.



KEOFITT CLASSIC 4KAI VALVE - BODIES

			WELDING BODIES		CONNECTION	ON BODIES
		TANK WELDING	PIPE WELDING	PIPE WELDING NW25	MINI CLAMP	CLAMP 1" & 1½"
4KAI BODIES	HOSE PIECE					
		440001	440011	440014	440021	440022


KEOFITT CLASSIC 4KAI VALVE - HEADS


	UF	III CLASS	TIC TRAI V	MLVE - NE
		TYPE H TURN KNOB 0-10 BAR (G)	TYPE Q LEVER HANDLE 0-10 BAR (G)	TYPE N PNEUMATIC 0-10 BAR (G)
	SILICONE			
		440041	440043	440044
4KAI HEADS	ЕРДМ	440041E	440043E	440044E
	PTFE			
		445541	445543	445544

KEOFITT CLASSIC 4KAI - PARTS & ACCESSORIES

	O-RINGS	800830 10.3X2.4 SILIC	800830E EPDM 10.3X2.4	550184 FESTO	600825 SILICONE 7.1X1.6						
RIES	MEMBRANES	400051 SILICONE	400052 EPDM	400055 PTFE							
& ACCESSORIES	E PIECE	550003 PTFE QC 1.0M	550002 PTFE QC 0.5M	550057 KÄRCHER ADAPTOR	600062 RUBBER CAP	800053 QC/QC W9	800082 QC HOSE BARB 3/8	800083 QC TC	800086 QC W9 WITH M4 HP	800061 QC PLUG	800070 QC STEEL PIPE
LD - PARTS	FOR HOSE PIECE	900045 QC SYRINGE INJECTION	900031 HP MALE THREAD M12	800058 COIL	800059 XL COIL	800091 QC PTFE					
- GIOGOLD -	VALVE HEADS	900018 TOMMY BAR	600370 LEVER HANDLE SELF-CLOSING	600170 LEVER HANDLE Q/N	400255 TOOL PTFE						
	MISC.	440064 DOUBLE ST. ST. CHAIN	900086 CLAMP RING 1"	900075 CLAMP RING 1/2"	900047 TUBE PTFE 10/8	900087 GASKET 1/2"	900091 GASKET EPDM 1"	550002.2 PTFE QC/TC 0.5M	550003.2 PTFE QC/TC 1.0M	440149 BUSHING FOR 4KAI/BASIX HEAD	800052 HOSE PIECE/ HOSE PIECE

HOW IT WORKS

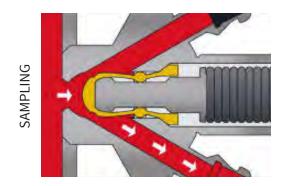

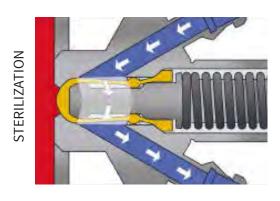

KEOFITT CLASSIC W15 SAMPLING VALVE

The KEOFITT CLASSIC W15 Sampling Valve is designed for high viscosity products in the range of 0-50,000 cP with particles up to 8 mm in diameter. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).

This valve is used in a range of industries such as brewery, dairy, pharmaceutical and bio-tech for products such as:

- Yoghurt
- Honey
- Syrup
- Ketchup
- Marmalade
- Creams and lotions
- Fruit pulp products

Available with PTFE membrane.



KEOFITT CLASSIC W15 VALVE - BODIES

		WELDING	BODIES		CONNECTION	ON BODIES	
		TANK WELDING	PIPE WELDING	VARIVENT Ø68	CLAMP 1"	CLAMP 2"	CLAMP 3"
W15 BODIES	3/4" TRI-CLAMP						
5 BO		860001	860011	860009	860004	860002	860003
EW	3/4" WELDING ENDS	860007	on request	on request	on request	on request	on request


KEOFITT CLASSIC W15 VALVE - HEADS


		TYPE H TURN KNOB 0-10 BAR (G)	TYPE B NO SPRING 0-12 BAR (G)	TYPE N PNEUMATIC 0-10 BAR
W15 HEADS	PTFE			
		865541	865547	865544

KEOFITT CLASSIC W15 - PARTS & ACCESSORIES

	O-RINGS	400208 EPDM 60X3	550184 FESTO				
SORIES	MEMBRANES	860055 PTFE					
W15 PARTS & ACCESSORIES	FOR MINI TRI-CLAMP	300021 CLAMP PTFE 10/8	550004 PTFE TC 0.5M	550005 PTFE TC 1.0M	800014 ADAPTER TC/1"	900013 MINI CLAMP SPIKE	900096 ADAPTER HP/TC
W15 PA	FOR VALVE HEADS	600170 LEVER HANDLE Q/N	600370 LEVER HANDLE SELF-CLOSING	860255 TOOL PTFE			
	MISC.	900021 BLIND CAP	900074 GASKET EPDM 3/4"	900092 GASKET EPDM 2"	900093 GASKET EPDM 3"	900075 CLAMP RING 1/2"	900186 2" CLAMP RING

HOW IT WORKS

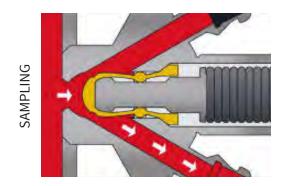

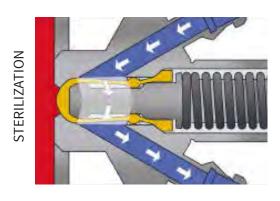


KEOFITT CLASSIC W25 SAMPLING VALVE

The KEOFITT CLASSIC W25 Sampling Valve is the largest KEOFITT sampling valve. Designed for sampling of very high viscosity products in the range of 0-250,000 cP and particles less than 17 mm in diameter. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).

This valve is used in a range of industries such as food, dairy, pharmaceutical and bio-tech for products such as:

- Peanut Butter
- Fruit Pulp
- Syrup
- Cellulose
- Fruit Mixed Products
- Cosmetics

Available with PTFE membrane.

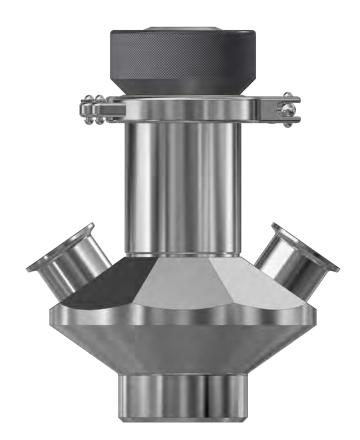

KEOFITT CLASSIC W25 VALVE - BODIES

		WELDING	BODIES	CONNECTI	ON BODIES
		TANK WELDING	PIPE WELDING	VARIVENT Ø68	CLAMP 3"
IES	1" CLAMP		on request		
W25 BODIES		870001		870009	870003
W2	WELDING LINER	On tequess	On tequess	On Fequess	On requess

KEOFITT CLASSIC W25 VALVE - HEADS

	TYPE N LEVER HANDLE PNEUMATIC	TYPE B NO SPRIN 0-12 BAR	
W25 HEADS	875544	875547	

KEOFITT CLASSIC W25 - PARTS & ACCESSORIES

	O-RINGS	400208 EPDM 60X3	900091 GASKET EPDM 1"			
ACCESSORIES	MEMBRANES	870055 PTFE				
W25 PARTS & ACCESSORIES	FOR VALVE HEADS	870255 TOOL PTFE				
	MISC.	800014 ADAPTER TC/1"	900093 GASKET EPDM 3"	900086 CLAMP RING 1"	900187 CLAMP RING FOR W25 VALVE	

KEOFITT SINGLE-PORT SAMPLING VALVE


Replace your ordinary, non-hygienic sampling cocks with the KEOFITT Single-Port Sampling Valve.


This valve is CIP-able with process CIP and still true to the KEOFITT concept, as it is available with various process connections with manual or pneumatic operation.





HOW IT WORKS

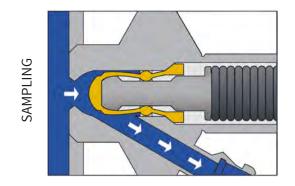

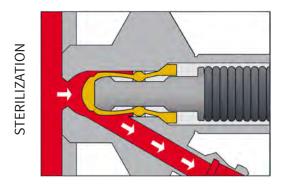

KEOFITT SINGLE-PORT W9™ SAMPLING VALVE

The KEOFITT Single-Port W9™ sampling valve is our solution for CIP-able sampling from less demanding applications. If the KEOFITT Single-Port sampling valve BASIX™ does not cover your need due its smaller size, the 9mm outlet on the Single-Port W9 will do the job. With the W9-solution you have the added benefit of choosing products from a selected range within the W9 product outline.

This valve is designed for sampling of products with a viscosity of 0-1000 cP with particles up to 3 mm in diameter.

The Single-Port W9 valve is usable for simple, hygienic sampling in all industries for products such as:

- Water
- Milk
- Perfume
- Fruit juice

Available in many versions; choose your preferred type of head from our W9 product outline.





KEOFITT W9 SINGLE-PORT BODIES

	WELDIN	G BODIES	CONNECTION BODIES				
	TANK WELDING	PIPE WELDING	VARIVENT Ø50	VARIVENT Ø68	MINI CLAMP	CLAMP 1" & 1½"	
W9 SINGLE-PORT BODIES							
	850001-1	850011-1	850008-1	850009-1	850036-1	850021-1	

^{*} CHOOSE VALVE HEAD AND PARTS & ACCESSORIES FROM THE W9 SECTION

HOW IT WORKS

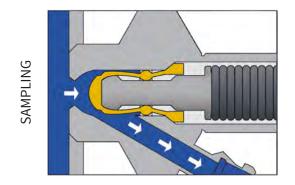

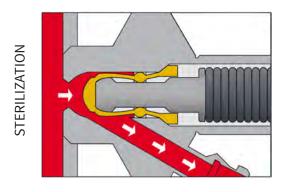

KEOFITT BASIX SAMPLING VALVE

The KEOFITT BASIX™ Sampling Valve is our basic CIP-able sampling valve for less demanding applications. The KEOFITT BASIX™ Sampling Valve is our product category for process CIP-able sampling valves for less demanding applications that require no separate inlet for sterilizing or sanitizing media.

This valve is designed for sampling of low viscosity products in the range of 0-100 cP with particles less than 1,5 mm in diameter.

Basix[™] is used for simple, hygienic sampling in all industries for products such as:

- Water
- Milk
- Perfume
- Fruit Juice

Available in manual and pneumatic versions this valve is offered complete as a valve body and valve head combination.

Choose from silicone, EPDM or PTFE membranes.



KEOFITT BASIX™ VALVES

		MANUAL VALVE			PNEUMATIC VALVE				
		TANK WELDING	PIPE WELDING	MINI CLAMP	1" & 1½" CLAMP	TANK WELDING	PIPE WELDING	MINI CLAMP	1" & 1½" CLAMP
BASIX™ VALVES									
BA	SILICONE	450141	451141	452141	452241	450144	451144	452144	452244
	ЕРДМ	450141EPDM	451141EPDM	452141EPDM	452241EPDM	450144EPDM	451144EPDM	452144EPDM	452244EPDM
	PTFE	450141PTFE	451141PTFE	452141PTFE	452241PTFE	450144PTFE	451144PTFE	452144PTFE	452244PTFE

KEOFITT BASIX™ - PARTS & ACCESSORIES

	0-RINGS	550184 FESTO	600825 SILICONE 7.1X1.6	800830 SILICONE 10.3X2.4	830830E EPDM 10.3X2.4				
RIES	MEMBRANE	400051 SILICONE	400052 EPDM	400055 PTFE					
& ACCESSORIES	E PIECE	450063 SINGLE ST.ST. CHAIN	550002 PTFE QC 0.5M	550003 PTFE QC 1.0M	550002.2 PTFE QC/TC O.5M	550003.2 PTFE QC/TC 1M	600062 RUBBER CAP	800058 SAMPLING COIL W9	800059 SAMPLING COIL XL W9
- PARTS	FOR HOSE PIECE	800053 QC/QC W9	800061 QC PLUG	800070 QC STEEL PIPE	800082 QC W9 HOSE ID 7	800083 QC TC	800086 QC W9 WITH M4 HP	800091 QC PTFE	900045 QC SYRINGE INJECTION
BASIXTM	MISC.	400255 TOOL FOR MEMBRANE (PTFE)	440149 BUSHING FOR 4KAI/ BASIX HEAD	600170 LEVER HANDLE Q/N	600370 LEVER HANDLE SELF-CLOSING	800052 HOSE PIECE/ HOSE PIECE W9	900018 TOMMY BAR	900031 HP W9/MALE THREAD M12	900047 TUBE PTFE 10/8MM
	IW	900087 GASKET MINI CLAMP 1/2" EPDM	900091 GASKET EPDM 1"	900075 CLAMP RING 1/2"	900086 CLAMP RING 1"				

KEOFITT SAMPLING BAGS

This is where you find everything you need to complete your KEOFITT sampling system:

The main products for this category is the unique single-use sampling bag systems allowing safe and aseptic sampling from any type of sampling valve. You can improve sample integrity and convenience immediately by using these products for existing sampling devices – whether they are KEOFITT or not.

The KEOFITT Sampling Bags have all been developed as single-use solutions to the cumbersome and difficult task of taking a representative sample and bringing it safe and clean from the sampling point to the laboratory.

At the same time the KEOFITT Sampling Bags offer convenience and safety in use and higher efficiency in the work process. No prior assembly or cleaning of any components; no glass or metal component is introduced to the production area.

All KEOFITT Sampling Bags are made of medical grade plastics complying with all relevant FDA, USP and ISO regulations for both the food and the pharmaceutical/biotech industries.

The KEOFITT Sampling Bags are delivered separately packed and sterilized by irradiation. In each carton a Radiation Certificate and a Certificate of Conformity are enclosed.

The KEOFITT Sampling Bags are manufactured following strict in-process testing including a test for endotoxins.

The proper performance of all KEOFITT Sampling Bags is supported by a number of validation documents covering SIP'ability, biocompatibility, extractables, USP Class VI, endotoxins, mechanical and chemical properties etc.





KEOFITT SAMPLING BAG™

The brand new single-use KEOFITT Sampling Bag[™] is designed to collect liquid process samples in a hygienic, safe and efficient way.

The KEOFITT Sampling Bag[™] is suitable for any liquids with very high viscosity in the range of 0-250,000 cP and liquid products with solid particles with a size of up to 15mm in diameter.

Its unique and certified design allows an effective sterilization or disinfection of the complete flow prior to sampling to ensure the integrity of the sample.

The samples will be protected from any air-borne or cross contamination, as they are taken into a closed and hygienic system.

The KEOFITT Sampling Bag[™] fits ALL KEOFITT valves - including W15 and W25 valves.

Intended for collecting and storing any samples for microbiological and chemical/physical analysis, it is an ideal solution for food/dairy/beverage/brewing applications.





HOW IT WORKS



Remove the seal from the inlet and outlet and connect the bag to the valve by using the corresponding fitting.



Clean/sterilize the flow path (valve and bag) through the valve inlet.



Open the bag and the sampling valve to take the sample.



Close the valve and the bag (optional: flush/clean/sterilize again)



Remove the bag and bring it to the lab for analyzing the sample.

KEOFITT SAMPLING BAG™

KEOFITT SAMPLING BAG™ KEOFITT SAMPLING BAGTM BAGTM KEOFITT SAMPLING BAG™ INLET **KEOFITT KEGFITT** SIZE ART.NO. 1000 ML 151000 2000 ML 152000

PARTS & ACCESSORIES

	FOR KSB INLET	FOR KSB OUTLET
ES		
SOR	150083 QUICK COUPLING KSB INLET FOR HOSE PIECE	150061 QUICK COUPLING KSB OUTLET STAINLESS STEEL PLUG
& ACCES		
RTS 8	150085 QUICK COUPLING KSB INLET 1" CLAMP	150082 QUICK COUPLING KSB OUTLET 3/8" HOSE BARB (CLOSABLE)
AGTM PA		
NG B	150088 QUICK COUPLING KSB INLET 1/2" CLAMP	
KEOFITT SAMPLING BAG™ PARTS & ACCESSORIES		
Ħ	150084 QUICK COUPLING KSB INLET 3/4" CLAMP	
KEO	150003	
	150062 QUICK COUPLING KSB INLET STAINLESS STEEL PLUG	

KEOFITT STERILE SAMPLING BAGS

The KEOFITT Sterile Sampling Bag is a sterile, pre-irradiated sampling bag wrapped in a sealed PE-bag. The sterile condition and the closed fluid path enables the user to extract liquid samples from the process line greatly reducing the risk of contaminating the sample from airborne contaminants in the environment compared to using traditional sample recipients.

The KEOFITT Sterile Sampling Bag is the ultimate sampling bag solution based on KEOFITT's renowned high quality and ultra hygienic sampling valve design. It is delivered with either a Mini Tri-Clamp or a KEOFITT W9 Quick Coupling.

The Sterile Sampling Bag is intended for collecting and easy storage of samples for chemical analysis. For microbiological samples the Aseptic Sampling Bag is recommended.


The product to be sampled should have a maximum viscosity of 1000 cP and should not contain particles larger than 3 mm in diameter. Products with higher viscosity may be sampled, only will it take longer.

The KEOFITT Sampling Bag is foreseen with a secondary port with a septum for extracting a sample of the sample or for injecting a substance into the sample. The secondary port also fitted with Luer Lock fittings (male and female) for secure and sterile connection to relevant equipment in a Laminar Air Flow (LAF) bench.



HOW IT WORKS

KE FITT STERILE SAMPLING BAG

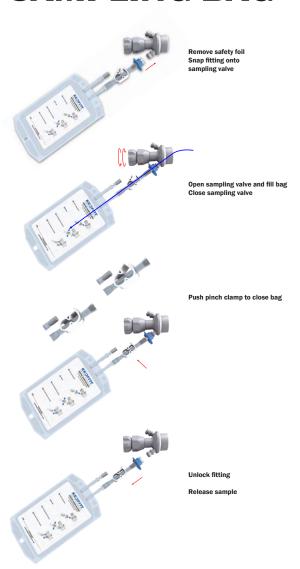

KEOFITT STERILE SAMPLING BAGS

		STERILE SAMPLII	NG BAGS	
			SIZE	ART. NO.
			1000 ML	111000
ING BAGS			2000 ML	112000*
KEOFITT STERILE SAMPLING BAGS	HOSE PIECE			

^{*} ON REQUEST ONLY!

KEOFITT ASEPTIC SAMPLING BAGS

The KEOFITT Aseptic Sampling Bag is a sterile, pre-irradiated sampling bag wrapped in a sealed PE-bag. Contrary to the Sterile Sampling Bag the Aseptic Bag is equipped with a 3-way valve allowing to steam sterilize the bag system before sampling. The sterile condition and this possibility to steam the flowpath in a closed circuit enable the user to extract a truly representative aseptic sample from a liquid process line sampling point in a convenient way.

The KEOFITT Aseptic Sampling Bag is the ultimate sampling bag solution based on KEOFITT's renowned high quality and ultra hygienic sampling valve design. The unique design allows the connection between the sampling valve and the sampling bag to be steam sterilized in place. It is delivered with either a Mini Sanitary Clamp or a KEOFITT W9 Quick Coupling.


The Aseptic Sampling Bag is a single use product intended for collecting and easy storage of samples from true aseptic samples for microbiological and chemical analysis.

The product to be sampled should have a maximum viscosity of 1000 cP and should not contain particles larg Laminar Air Flow (LAF) bench.



HOW IT WORKS

KE FITT ASEPTIC SAMPLING BAG

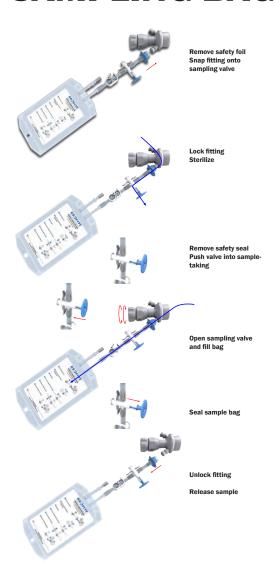

KEOFITT ASEPTIC SAMPLING BAGS

		ASEPTIC SAMPLIN	IG BAGS	
			SIZE	ART. NO.
			250ML	120250
BAGS	HOSE PIECE		500 ML	120500
IPLING	HOSE		1000 ML	121000
KEOFITT ASEPTIC SAMPLING BAGS			2000 ML	122000
T ASEP	CLAMP		500 ML	120500TC
KEOFIT			2000 ML	122000TC
	MINI TRI-CLAMP			

KEOFITT SPIKE SAMPLING BAGS

The KEOFITT Spike Sampling Bag is a cost-effective single-use sampling bag to be used where requirements to sterility and storage time are less severe. It features a unique auto-sealing septum allowing very thick needles for fast and convenient sampling of most liquids including viscous products.

The KEOFITT Spike Sampling Bag is a single-layer sampling bag manufactured under cleanroom conditions (class D) and available in:

• A polypropylene (PP) bag where cleanroom manufacturing conditions are sufficient

The Spike Sampling Bag features a unique sealed and sterilized septum, which accepts very large needles (spikes) with 2-3 mm internal diameter. This assures a much faster sampling process than otherwise experienced with hypodermic needles. Despite the large needle the unique septum design assures an auto-sealing effect after collection of the sample.

The Spike Sampling Bag works with the KEOFITT Quick Coupling Spikes that fit all standard Simplex, M4 and W9 KEOFITT Sampling valves with either KEOFITT Hose Piece connection or Mini Clamp connection (see Accessories).



KEOFITT SPIKE SAMPLING BAGS


	SPIKE BAG	S	
		SIZE	ART. NO.
		1000 ML	131000PP
KEOFITT SAMPLING BAGS	REGITTE RECORTED SPING BAMPLING BAG (PP)* - COLUMN STATE OF THE STA		

KEOFITT SAMPLING BAGS - PARTS & ACCESSORIES

	FOR HOSE PIECE	400830 SILICONE 5.3X2.4	800830 SILICONE 10.3X2.4	800013 QC SPIKE (W9)		
& ACCESSORIES	FOR MINI TRI-CLAMP	900013 MINI CLAMP SPIKE	800014 ADAPTOR TC/1"	800083 QC W9/TC	900096 ADAPTOR W9/W15 HP/TC	900075 CLAMP RING ½"
W25 PARTS &	FOR MIN	900087 GASKET EPDM ½"	900074 GASKET EPDM¾"			

SAMPLING

STERILIZATION

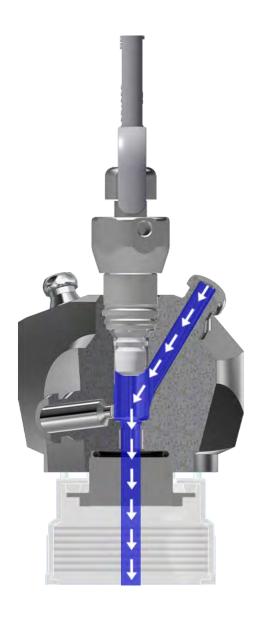



KEOFITT BOTTLE SAMPLING SYSTEMS

The KEOFITT Aseptic System enables the user to take a truly representative aseptic sample. It protects the sample against airborne contamination, while extracting the sample, during transportation and storage.

The standard operating procedure involves steaming the sampling valve with the KEOFITT Aseptic System connected, in order to sterilize the sampling valve and the connection between the sampling valve and the KEOFITT Aseptic System. This procedure ensures the sterilization of the whole flow path in a closed circuit.

The KEOFITT Aseptic System is based on KEOFITT's guarantied high quality, microbiologically safe valve design. It shall be used with PP sampling bottles (# 260325 / 260525 / 260625 / 260725 / 260825), which are autoclavable, robust and translucent.



KEOFITT SAMPLING BOTTLE SYSTEMS

	ASEPTIC SAMPLING SYSTEM FOR BOTTLE SIZES 250-2000ML	ASEPTIC SAMPLING SYSTEM FOR BOTTLE SIZES 4000/5000ML	SAMPLING BOTTLE HEAD W9	SAMPLING BOTTLE HEAD W15	SAMPLING BOTTLE HEAD W25
SAMPLING BOTTLE SYSTEMS					
	260005	260006	260030	860030	870030

KEOFITT SAMPLING BOTTLES - PARTS & ACCESSORIES

	•	III JAME	LING DO		AILIOWA	CCLSSOR				
	BOTTLES	260325	260525	260625	260725	260825				
Ш		PP BOTTLE 250ML	PP BOTTLE 1000ML	PP BOTTLE 2000ML	PP BOTTLE 4000ML	PP BOTTLE 5000ML				
SAMPLING BOTTLES - PARTS & ACCESSORIES	TUBINGS	550002 PTFE QC 0.5M	550002.2 PTFE QC/TC 0.5M	550003 PTFE QC 1.0M	550003.2 PTFE QC/TC 1M	550004 PTFE TC 0.5M	550005 PTFE TC 1.0			
		260327 GASKET PP 250-2000 ML	260427 GASKET PP 4000/5000 ML	260326 LID PP BOTTLE W/HOLE 250-2000 ML	260328 LID PP BOTTLE 250-2000 ML	260426 LID PP BOTTLE W/ HOLE 4000/5000 ML	260428 LID PP BOTTLE 4000/5000 ML	260081 QC F/FILTER ASEPTIC SYSTEM	260122 STERILE FILTER FOR ASEPTIC SYSTEM	
	MISC.	260158 O-RING EPDM 21.89X2.62	260159 O-RING EPDM 24.6X2.4	800014 ADAPTER TC/1"	800053 QC/QC W9	800061 QC W9 ST. ST. PLUG	900096 ADAPTER HP/TC	900097 ADAPTER HP/TC	900021 BLIND CAP MINI CLAMP	900076 BLIND CAP 1" CLAMP
		900074 GASKET EPDM 3/4"	900091 GASKET EPDM 1"	900075 CLAMP RING 1/2"	900086 CLAMP RING 1"					

KEOFITT VARIOUS

Being the world market's only true specialist KEOFITT has developed the widest and deepest product range available for sampling of liquids in all industries.


To satisfy the specific demands from the different industries KEOFITT has introduced a various special items, such as:

- Micro Port
 provide an easy and hygienic solution for extracting liquid samples from a production batch using hypodermic needles or syringes.
- Portable Steam Cleaning Unit designed to provide steam for cleaning and disinfecting in sampling locations where a fixed steam supply is not available.
- Carlsberg Flask vessel system
 designed for the propagation of yeast cultures in a sterile environment and the transfer of the pure yeast culture under sterile conditions.





HOW IT WORKS

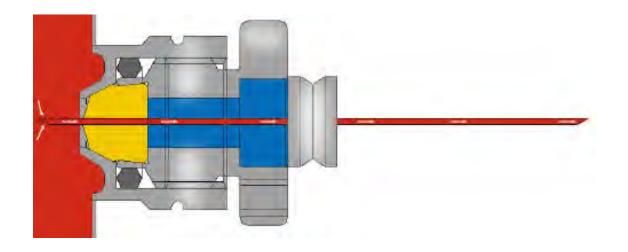

KEOFITT MICRO PORT

The KEOFITT MICRO PORT is a re-sealing rubber septum designed to take samples using hypodermic needles or syringes with minimal risk of contamination. Designed for sampling low viscosity products in the range 0-50 cP.

The KEOFITT MICRO PORT is easy to use and maintain, if needle sampling is required.

The Micro Ports are used in a range of business areas, such as brewery, dairy, pharmaceutical and biotechnological industries, with a wide range of products such as:

- Water
- Medical solutions
- Milk
- Filtered Beer
- Perfume
- Olive Oil

Available as a single septum or as a MULTI MICRO PORT with seven septums.





KEOFITT MICRO PORT

			MICRO PORT		MULTI MICRO PORT 49				
		TANK	PIPE WELDING 1"	PIPE WELDING NW25	TANK WELDING 7 X BUTYL MEMBRANE	VARIVENT Ø68 7 X BUTYL MEMBRANE	CLAMP 3" 7 X BUTYL MEMBRANE		
RT 49									
P 0	BUTYL (IIR) MEMBRANE	900056	900057	900014					
CRO		VARIVENT Ø31	VARIVENT Ø50 VARIVENT Ø68						
MICRO PORT / MULTI MICRO PORT 49		900026	900027	900028					
		MINI CLAMP 1" & 1 ½"							
M									
		900059	900058		840001	840009	840020		

KEOFITT MICRO PORT - PARTS & ACCESSORIES

	O-RINGS		0	0					
S		400208 EPDM 60X3	900822 EPDM 9.3X2.4	900824 EPDM 14X4	900825 EPDM 44.6X2.4				
S & ACCESSORIES	SEPTUM	900049 BUTYL							
MICRO PORT PARTS	13	600065 CHAIN FOR MULTI MICRO PORT	900077 CHAIN	840055 FILM MULTI	840102 INNER PLATE FOR MICRO PORT	840118 TOOL MULTI	900054 NEEDLE	900055 WICK	
Σ	MISC.	900075 CLAMP RING 1/2"	900086 CLAMP RING 1"	900074 GASKET EPDM 3/4	900087 GASKET EPDM ½"	900091 GASKET EPDM 1"	900093 GASKET 3" CLAMP EPDM	INSERT FOR MICRO PORT	900102 900441 PLUG

KEOFITT STEAM BOILER

550002 PTFE TUING W/QC 0.5M 550003 PTFE TUING W/QC 1.0M 800830 O-RING SILCONE 10.3X2.4 150830 **O-RING SILICONE 16X3** 900031 HP W9/MALE THREAD M12 550000 550242 STEAM BOILER **BURNER STAND**

KEOFITT CLIP-ON STEAMER



KEOFITT CARLSBERG FLASK

200210 550002 FILTER FOR CARLSBERG PTFE TUBING W/QC 0.5M **FLASK** 550003 900031 PTFE TUBING W/QC 1.0M HP W9/MALE THREAD M12 600051 900049 MEMBRANE SILICONE W9 MEMBRANE BUTYL 550057 KÄRCHER/KEOFITT 900037 ADAPTOR HP M4/MALE THREAD M12 800830 900074 GASKET CLAMP 3/4" O-RING SILCONE 210001 10.3X2.4 **EPDM** CARLSBERG FLASK

KEOFITT RECIRCULATOR

